



NVR Quick Start Guide

For more information of your new system, please refer to www.zositech.com


Contents

EN	01
ES	12



The electronic user manual can be viewed on your mobile devices by scanning the QR code using a browser or camera.

1 What's in the box



NVR



NVR Power Adapter



USB Mouse



3ft(1m) Ethernet Cable





HDMI Cable




Quick Start Guide

NOTE: Products and accessories vary by product models, please refer to the actual product.

2 Introduce the NVR

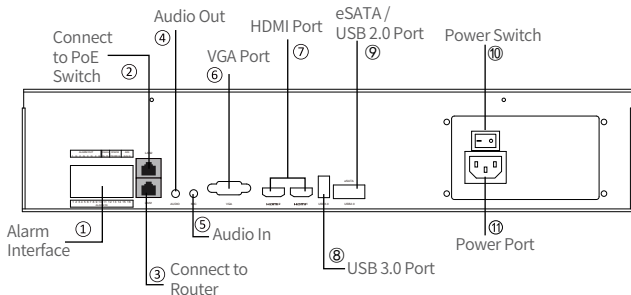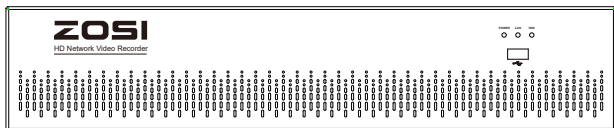

NOTE: The actual appearance and components may vary with different products, please refer to the actual product.

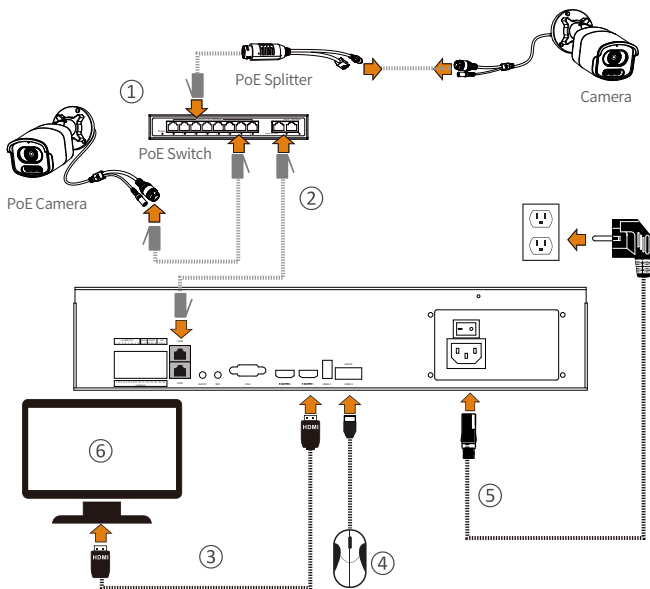

1. Use an Ethernet cable to connect the camera to the PoE port of the PoE switch. For non-PoE cameras, first connect them to a PoE splitter, then use an Ethernet cable to connect the splitter to the PoE switch.
2. Use another Ethernet cable to connect the PoE port of the NVR to the LAN port of the PoE switch.
3. Connect the NVR to a monitor using a VGA or HDMI cable.
4. Plug a USB mouse into the NVR's USB 2.0 port.
5. Connect the power cable to the power port.
6. Press the power switch — once powered on, the monitor will display the camera's live view.

Notes:

1. To ensure proper functionality, it is recommended to power on the NVR for testing before final installation.
2. After connecting the cameras to the NVR and confirming video output, connect the NVR to the router for network access.
3. HDMI1 supports a maximum resolution of 4K, while VGA and HDMI2 (when connected simultaneously) will prioritize HDMI2 with a maximum supported resolution of 1080p.

3 Access the System via Smartphone or PC

3.1. Smartphone

Search “Zosi Smart” in the APP Store or use a browser to scan the QR code below, download and install the app and follow the instructions to register an account.



Zosi Smart



App (IOS/Android)



Operation video link

3.2. PC

Download path: Go to <https://www.zositech.com/pages/app>.

4 Set up the NVR System


4.1. Mouse Operation:

Left Button:

- Preview or Playback Interface: Double-click a single channel to enter full screen and double-click again to exit full screen.
- Navigation Menu: Left click to select a menu option.

Right Button:

- Right click to bring up the main menu when the mouse is on the preview interface.
- Navigation Menu: Right click to exit the menu or return to previous menu option.

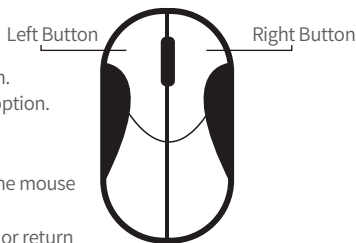


4.2. Introduce the Menu Bar:

Right-click anywhere on the screen to open the menu bar.

 Single	>	• Single - Select single channel for live viewing
 Multi	>	• Multi - Select multi-channel for live viewing
 Start Scan		• Start Scan - Start/Stop Scan
 Colour		• Colour - Adjust colour and image settings
 E-Zoom		• E-Zoom - E-Zoom the preview interface
 Audio		• Audio - Adjust the camera volume
 PTZ		• PTZ: Control the rotation of PTZ camera
 Snap		• Snap - Snap and save the live view images
 Stop Record		• Stop Record - Start/stop record
 Playback	>	• Playback - Search Video playback and quick playback
 Intelligent Detect	>	• Intelligent Alarm - Set up Human Detection and Siren-Light Alarm
 IPC Channel Config		• IPC Channel Configuration - IPC channel configuration management
 Main Menu		• Main Menu - Enter the Main Menu


4.3. System Password:

The factory default username is “admin” and the password is empty, so the first time users can login the system directly.

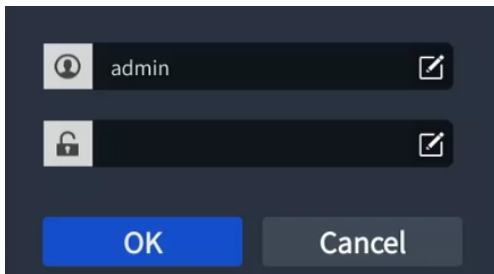


The image shows a login interface with two input fields. The first field has a user icon and contains the text 'admin'. The second field has a lock icon and is empty. Both fields have a small icon on the right side. Below the fields are two buttons: 'OK' and 'Cancel'.

Change Password Path: Right click the mouse-Main Menu-Setup-Users-Change Password
NOTE: The new password setting cannot be less than 6 characters, please keep the password properly.

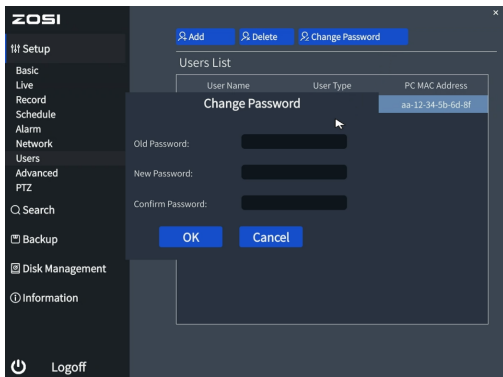

5 Date & Time Setting

Right click the mouse - Main Menu - Setup - Basic - Date & Time - Choose the corresponding time according to your region and then click “Apply” to save.
NOTE: The default time zone is GMT, please choose the corresponding time according to your region.

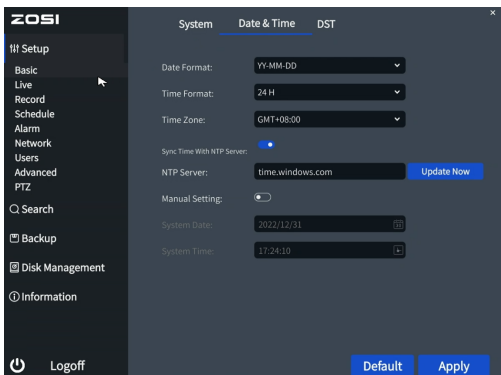

6 Video Playback

Right click on mouse - Playback - Time /Event

Time playback: View playback video based on time search


Event playback: View playback video based on event search



7 Backup

① Insert a USB into the USB 2.0 port on the PoE NVR.

② Right click the mouse > Main Menu > Backup > Select channels and time period > Search > Select the video clips you want to back up > Click “Apply” .

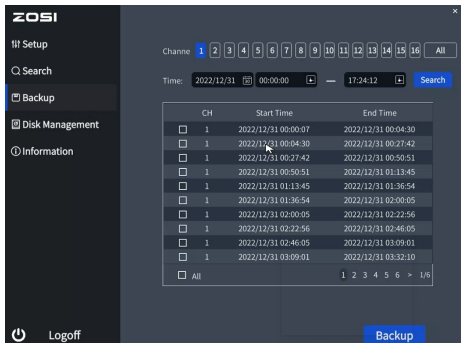

For more information about the system operation settings, please visit: <https://bit.ly/3zQsdLv>.

8 Usage Specification

- Use the camera only with compatible ZOSI NVRs.
- Read this guide carefully and keep it for future reference.
- Follow all instructions for safe use of the product and handle with care.
- Use the product within given temperature, humidity, voltage level noted in the device's specifications.
- Do not disassemble the product.
- Use only a regulated power supply with the product (optional). Use of a non-regulated, non-conforming power supply can damage the product and void the warranty.
- Periodic cleaning may be required. Use a damp cloth only. Do not use any harsh, chemical-based cleaners.
- Do not use the product in a sealed, humid environment. It is recommended to place it in a location that is easily ventilated for installation.
- Do not disassemble the device while power is on.

9 FAQ

Q: No Video Output on the Monitor?

- Ensure the lowest resolution of the monitor is no less than 720p.
- Ensure the NVR is powered on normally.
- Check the connection of the HDMI/VGA cable or use another cable to try again.

Q: Failed to Remotely Access the Camera via Mobile Phone or Computer?

- Ensure the NVR is connected to the network normally, you can go to the NVR Menu-Network-Test
- Test and verify whether you can access the Internet by connecting your phone or computer to the same network as the NVR.
- Reboot your NVR or router.

Q: Does the system support motion detection and image capture?

- It captures images automatically when people, cars, are detected or when there is a change in detected images. Users can also manually capture images using our ZOSI Smart APP.

FCC Compliance Statement

This device complies with Part 15 of FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including inference that may cause undesired operation.

Simplified EU Declaration of Conformity

ZOSI declares that the device is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.



Correct Disposal of this Product

This marking indicates that this product cannot be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal and promote the sustainable reuse of material resources, please recycle it responsibly. To return your used device, please visit the Return and Collection System or contact the retailer from whom the product was purchased. They can take this product away for environmentally safe recycling.

WARNING

- **INGESTION HAZARD:** This product contains a button cell or coin battery.
- **DEATH** or serious injury can occur if ingested.
- A swallowed button cell or coin battery can cause **Internal Chemical Burns** in as little as **2 hours**.
- **KEEP** new and used batteries **OUT OF REACH of CHILDREN**
- **Seek immediate medical attention** if a battery is suspected to be swallowed or inserted inside any part of the body.



- a) Remove and immediately recycle or dispose of used batteries according to local regulations and keep away from children. Do NOT dispose of batteries in household trash or incinerate.
- b) Even used batteries may cause severe injury or death.
- c) Call a local poison control center for treatment information.
- d) The compatible battery type: CR2032
- e) The nominal battery voltage: 3V
- f) Non-rechargeable batteries are not to be recharged.
- g) Do not force discharge, recharge, disassemble, heat above 60°C (manufacturer's specified temperature rating) or incinerate. Doing so may result in injury due to venting, leakage or explosion resulting in chemical burns.

Products with non-replaceable button/coin cell batteries shall additionally include a statement indicating the product contains non-replaceable batteries

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Warning Statements:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :


- (1) L' appareil ne doit pas produire de brouillage;
- (2) L' appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d' en compromettre le fonctionnement.

Radio Frequency Exposure Statement for IC

This equipment complies with IC exposure limits set forth for an uncontrolled environment. The device can be used in portable exposure conditions. This equipment shall be installed and operated with minimum distance 20cm between the radiator & body.

Cet équipement est conforme aux limites d'exposition IC établies pour un environnement non contrôlé. L'appareil peut être utilisé dans des conditions d'exposition portables. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et le corps.

1 Lista de empaque



NVR



Fuente de alimentación
para NVR



Ratón USB



Cable Ethernet de 3ft(1m)





Cable HDMI




Manual

NOTA: Los productos y accesorios varían por diferentes modelos, por favor consulte el producto específico.

2 Introducción del NVR

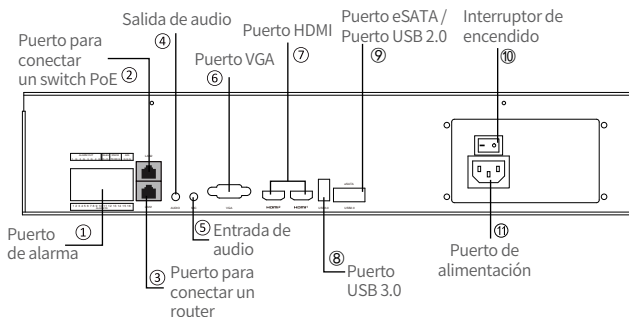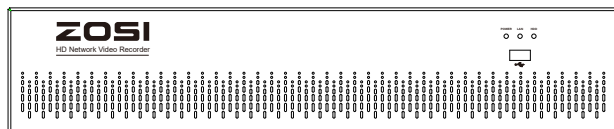

NOTA: La apariencia y los componentes variarán por diferentes productos, por favor consulte el producto específico.

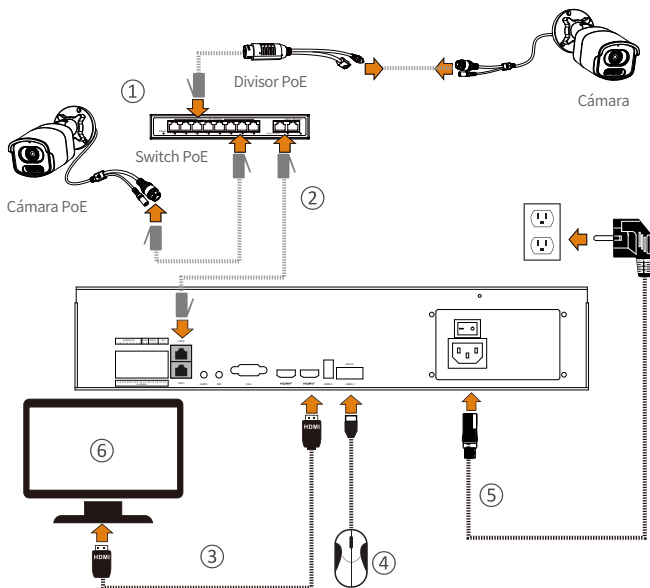

1. Utilice un cable de red para conectar la cámara al puerto PoE del switch PoE. Para cámara no PoE, primero conéctela a un divisor PoE y luego use un cable de red para conectar el divisor al switch PoE.
2. Use un cable de red para conectar el puerto PoE del NVR al puerto LAN del switch PoE.
3. Conecte el NVR a un monitor usando un cable VGA o HDMI.
4. Conecte un ratón USB al puerto USB 2.0.
5. Conecte el cable de alimentación al puerto de alimentación.
6. Presione el interruptor de encendido. Una vez que el dispositivo se encienda, el monitor mostrará la vista en vivo de las cámaras.

Notas importantes:

1. Para garantizar el funcionamiento correcto, se recomienda encender el NVR para realizar pruebas antes de la instalación final.
2. Se sugiere conectar primero las cámaras al NVR y verificar la señal de video, y finalmente conectar el NVR al router para acceso al Internet.
3. La conexión HDMI1 soporta una resolución máxima de 4K, mientras que cuando se conectan simultáneamente VGA y HDMI2, se priorizará HDMI2 con una resolución máxima soportada de 1080P.

3 Acceso al sistema a través de Teléfono Móvil o PC

3.1. Teléfono Móvil

Busque "Zosi Smart" en la APP Store o escanee el código QR a continuación, descargue e instale la aplicación siguiendo las instrucciones para registrar una cuenta.



Zosi Smart



App (IOS/Android)



Enlace del video de
operación

3.2. PC

Página web de descarga: <https://www.zositech.com/pages/app>.

4 Configuración del sistema NVR


4.1. Operación del ratón:

Botón izquierdo:

- Interfaz de vista previa o reproducción: Haga doble clic en único canal para entrar en la pantalla completa y haga doble clic de nuevo para salir de la pantalla completa.
- Menú de navegación: haga clic con el botón izquierdo para seleccionar una opción en el menú.

Botón derecho:

- Haga clic con el botón derecho para entrar en el menú principal cuando el ratón esté en la interfaz de vista previa.
- Menú de navegación: haga clic con el botón derecho para salir del menú o volver a la opción anterior.

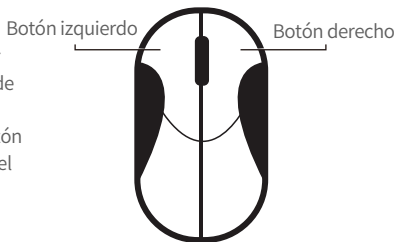

4.2. Introducción del menú:

Haga clic derecho en cualquier lugar de la pantalla para abrir el menú.

 Único	>	• Único: Seleccione un solo canal para vista en vivo
 Múltiples	>	• Múltiples: Seleccione múlti-canales para vista en vivo
 Iniciar escaneo		• Iniciar escaneo: Iniciar/Detener escaneo
 Color		• Color: Ajuste la configuración de color e imagen
 Amplificación electrónica		• E-Zoom: Agrande la interfaz de vista previa
 Audio		• Audio: Ajuste el volumen de la cámara
 PTZ		• PTZ: Controlar el giro de la cámara
 Foto		• Foto: Capture y guarde imágenes de vista en vivo
 Detener la grabación		• Detener la grabación: Iniciar/Detener las grabaciones
 Reproducir	>	• Reproducir: Busque reproducción de video y reproducción rápida
 Detección inteligente	>	• Alarma inteligente: Configure Detección Humana y Alarma de Sonido&Luz
 Config canal IPC		• Config canal IPC: Gestione la configuración de canal de IPC
 Menú principal		• Menú principal: Entre al Menú principal

4.3. Contraseña del sistema:

El nombre de usuario por defecto es "admin" y la contraseña está vacía, así que los usuarios pueden iniciar sesión en el sistema directamente por primera vez.

 admin 


 

OK

Cancelar

Método de cambiar contraseña: haga clic con el botón derecho del ratón - Menú principal - Configuración - Usuarios - Cambiar contraseña.

NOTA: La nueva contraseña no puede ser menos de 6 caracteres, por favor conserve la contraseña correctamente.

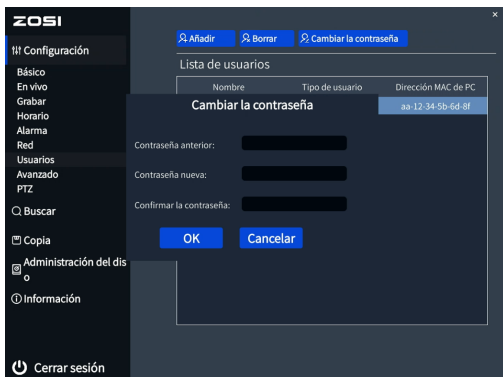

5 Configuración de la fecha y hora

Haga clic con el botón derecho del ratón - Menú principal - Configuración - Básico - Fecha y hora - Elija la hora correspondiente según su región y luego haga clic en "Aplicar" para guardar.

NOTA: El horario predeterminado es GMT, elija la hora correspondiente según su región.



6 Reproducción de vídeos

Haga clic en el botón derecho del ratón - Reproducir - Reproducción de tiempo/ Reproducción de eventos.

Reproducción de tiempo: Buscar vídeos a través de la búsqueda por hora


Reproducción de eventos: Buscar vídeos a través de la búsqueda por evento



7 Copia de seguridad

① Inserte un pendrive USB en el puerto USB 2.0 del NVR.

② Haga clic derecho del ratón - Menú principal - Copia de seguridad - Elija el canal y el período de tiempo - Buscar - Elija los videos que desea copiar > Haga clic en "Aplicar".

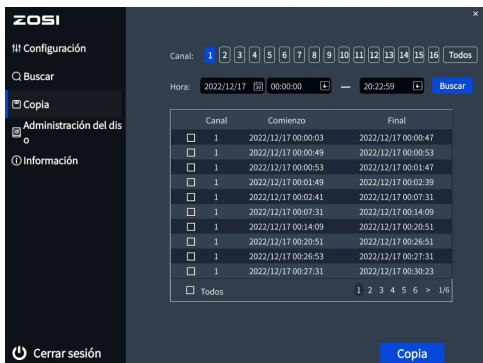

Para obtener más información sobre la configuración del sistema, por favor visite: <https://bit.ly/3zQsdv>.

8 Especificación de uso

- Use cámara con ZOSI NVRs compatibles solamente.
- Lea esta guía detenidamente y consérvela para consultarla en el futuro.
- Siga todas las instrucciones para un uso seguro del producto y manéjelo con cuidado.
- Utilice el producto dentro de la temperatura, la humedad y el nivel de voltaje indicados en las especificaciones del dispositivo.
- No desmonte el producto.
- Use una fuente de alimentación regulada con el producto (opcional) solamente. El uso de una fuente de alimentación no regulada y no conforme puede dañar el producto y anular la garantía.
- Es posible que se requiera una limpieza periódica. Utilice únicamente un paño húmedo. No utilice limpiadores agresivos a base de productos químicos.
- No utilice el producto en un entorno húmedo y sellado. Se recomienda colocarlo en un lugar que sea fácilmente ventilado para su instalación.
- No desmonte el dispositivo mientras esté encendido.

9 Preguntas frecuentes

Q: ¿No hay salida de vídeo en el monitor?

- Asegúrese de que la resolución mínima del monitor no es inferior a 720p;
- Asegúrese de que el grabador está encendido correctamente;
- Por favor compruebe la conexión del cable HDMI/VGA o cambie un otro cable de conexión/ monitor y vuelva a intentarlo;

Q: ¿No se puede acceder al dispositivo de forma remota por teléfono móvil o PC?

- Asegúrese de que el grabador está correctamente conectado a la red, Menú principal - Red - Prueba;
- Por favor compruebe el estado de la red conectándose a la misma red que el grabador por teléfono móvil o PC para la prueba;
- Reinicie el grabador o el router;

Q: ¿Soporta la detección de movimiento y la captura de imágenes el sistema?

A: Habilitarán la detección de movimiento y la captura de imágenes instantánea si la cámara está conectada a un DVR compatible. Capturará imágenes automáticamente cuando se detectan personas, vehículos o cuando el objetivo detectado mueve. Los usuarios también pueden capturar imágenes manualmente en la aplicación Zosi Smart.

Declaración de Cumplimiento de la FCC

Este dispositivo cumple con la Parte 15 de las Normas de la FCC.

La operación está sujeta a las siguientes dos condiciones:

- (1) Este dispositivo no puede causar interferencias perjudiciales.
- (2) Este dispositivo debe aceptar cualquier interferencia recibida, incluidas las inferencias que puedan provocar una operación no deseada.

Declaración de Conformidad de UE Simplificada

ZOSI declara que el dispositivo cumple con los requisitos esenciales y otras disposiciones relevantes de la Directiva 2014/53/UE.



Eliminación Correcta de este Producto

Esta marca indica que este producto no se puede desechar con otros residuos domésticos en toda la UE. Para evitar posibles daños al medio ambiente o la salud humana por la eliminación descontrolada de desechos y promover la reutilización sostenible de los recursos materiales, recíclelo de manera responsable. Para devolver su dispositivo usado, visite el Sistema de Devolución y Recolección o comuníquese con el minorista donde compró el producto. Pueden llevarse este producto para un reciclaje seguro para el medio ambiente.

ADVERTENCIA

- **RIESGO DE INGESTIÓN:** Este producto contiene una pila botón o batería de moneda.
- En caso de ingestión puede producirse la MUERTE o lesiones graves.
- A la ingestión de una pila de botón o batería de moneda puede provocar **Quemaduras Químicas Internas** en tan sólo **2 horas**.
- **MANTENGA** pilas nuevas y usadas **FUERA DEL ALCANCE DE LOS NIÑOS**.
- **Busque Atención médica inmediata** si se sospecha que se ha tragado o introducido una pila en cualquier parte del cuerpo.



a) Retire las pilas usadas y recíclelas o deséchelas inmediatamente de acuerdo con la normativa local y manténgalas fuera del alcance de los niños. NO tire las pilas a la basura doméstica ni las incinere.

b) Incluso las pilas usadas pueden causar lesiones graves o la muerte.

c) Llame a un centro de toxicología local para obtener información sobre el tratamiento.

d) El tipo de pila compatible: CR2032

e) El voltaje nominal de la pila: 3V

f) Las pilas no recargables no deben recargarse.

g) No fuerce la descarga, la recarga, el desmontaje, el calentamiento por encima de 60°C (temperatura nominal especificada por el fabricante) ni la incineración. De lo contrario, podrían producirse lesiones por ventilación, fuga o explosión que provoquen quemaduras químicas.

Los productos con pilas de botón/batería de moneda no sustituibles deberán además incluir una declaración que indique que el producto contiene pilas no sustituibles.

ZOSI



www.zositech.com

Support Email: service@zositech.com

Facebook: <https://www.facebook.com/ZosiTechnology/>

Whatsapp: +1-866-841-6932

UK Whatsapp: +86 18675610962

Copyright © 2025 ZOSI Technology Co., Ltd.

No part of this publication may be reproduced in any way without the written permission of ZOSI. The information in this publication is believed to be accurate in all respects. ZOSI assumes no responsibility for any consequences resulting from their use. As our products require continuous improvement, ZOSI reserves the right to modify product designs, specifications and prices without notice and without any obligation. All rights reserved, and ZOSI reserves the final interpretation right of this manual.



F92101400012210